



NT 400 Spark Arrestor

NT advanced flow design




Power Range HP - (Kw)	Exhaust Gas Flow Rate 500°C (calculated)	Weight
536 - 1006 (400 - 750)	5400 CFM @ 15" H₂O	53 Kg

FEATURES

- Centrifuge type, Turbine spin blades
- Ultra Low Back Pressure
- Good Silencing, no noise regeneration
- Designed for low emission diesel engines (stage IIIA, EURO V, Tier 4 and better)
- Intended for temporary or permanent installation
- Can be used with DPF, CAT, SCR (Ad Blue) and existing Muffler
- Improved internal gas flow dynamics
- Swelled and slotted pipe ends
- Supplied with pipe clamps
- All Stainless Steel 316L Construction


NT 400 PRODUCT DIMENSIONS

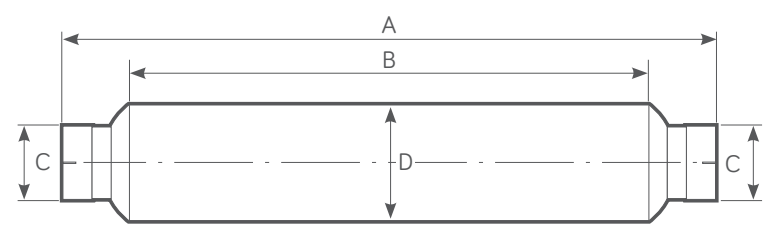

(A) mm	(B) mm	Available Pipe (C) mm (Inches)	(D) mm
1794	1500	202, 230, 255 (8 - 10)	397.8

TESTED AND APPROVED

- To ATEX EN1834 (parts 1, 2 & 3)
- ATEX Approved Body No. 2776
- UKEX Approved Body No. 2503



NT 400 FLOW PERFORMANCE

